



Bell Hydromatics

Poppet Valve & Lift Valve

Lift Valves



Ordering Code


V2068	A4	*	10
Series Number	Coil Type	Option	Design Number
V2073	A1: AC 100V(50/60Hz), AC 110V(60Hz)	NONE: Standard	10: PT (Rc) Threaded Connection
	A2: AC 200V(50/60Hz), AC 220V(60Hz)		
V2074	A3: AC 110V(50Hz)		
	A4: AC 220V(50Hz)		
V2080	A5: AC 240V(50Hz)	OM: with Manual	1080: PF(G) Threaded Connection
	A8: AC 380V(50/60Hz)		
V3080	D1: DC 12V		
	D2: DC 24V		1090: NPT Threaded Connection

V2073 – 3/8" Line Mounting Lift Valves

Ratings

Normal Closed – NC		Max. Flow	Max. Pressure	Operating Temperature Range	Weight	Terminations N: DIN 43650 Y: Lead Wires(2)
Normal Open – NO						
NC	NO	20lpm (5.28USgpm)	210 bar (3000PSI)	-20°C ~ 120°C 4°F ~ 248°F	0.7kg (1.54 lbs) with coil	

Dimensions:

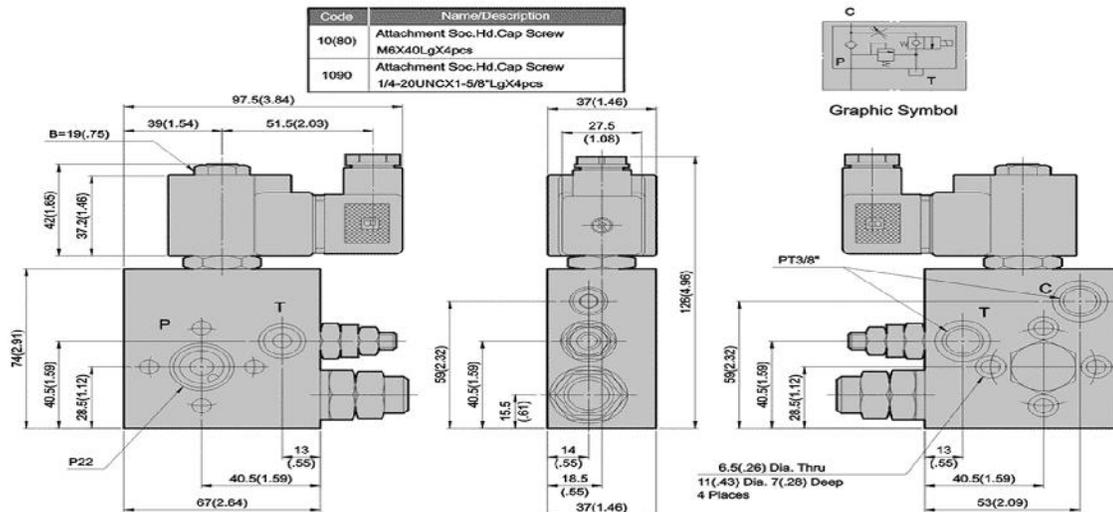


V2074 – 3/8" Line Mounting Lift Valves

V2074 – 3/8" Line Mounting Lift Valves

Ratings

Normal Closed – NC		Max. Flow	Max. Pressure	Operating Temperature Range	Weight	Terminations N: DIN 43650 Y: Lead Wires(2)
Normal Open – NO						
NC	NO	20lpm (5.28USgpm)	210 bar (3000PSI)	-20°C ~ 120°C 4°F ~ 248°F	1.0kg (2.2 lbs) with coil	

Dimensions:

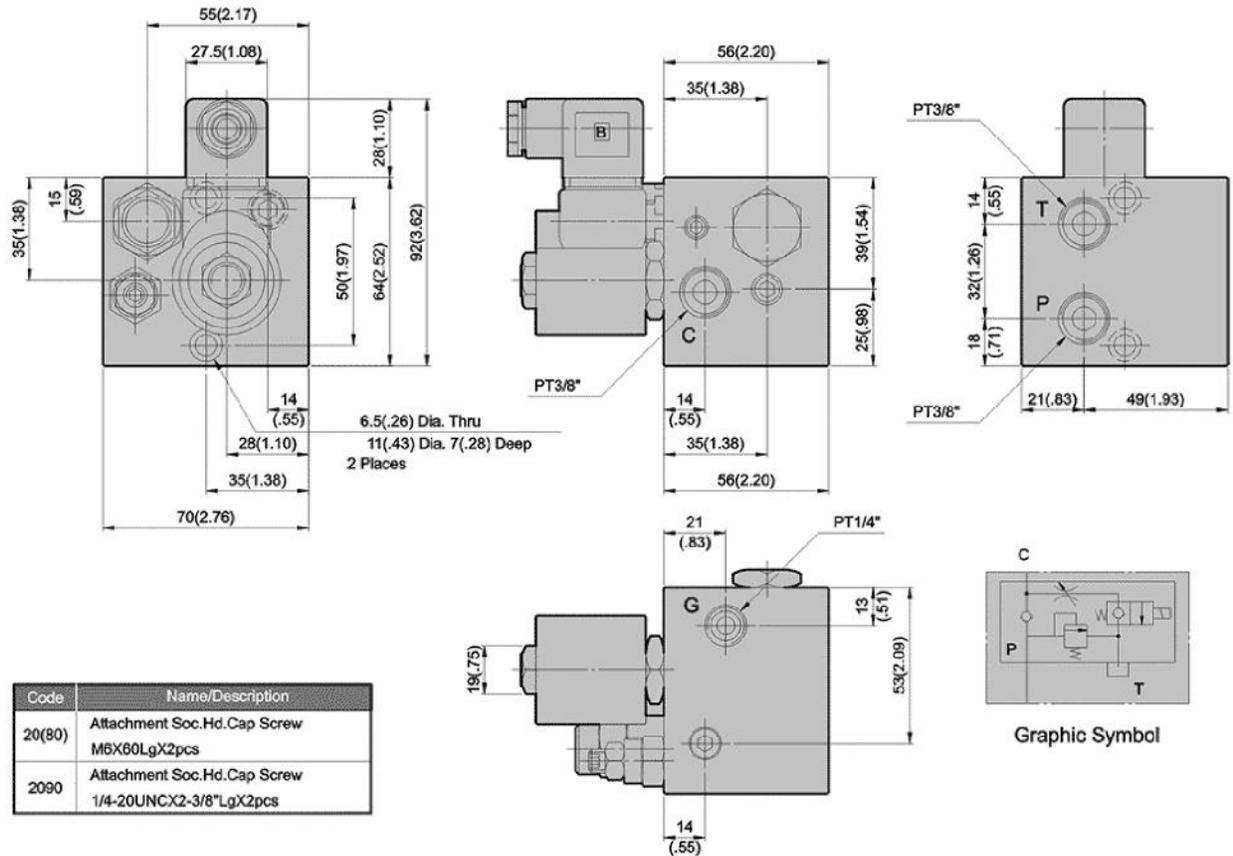


V2080 – 3/4" Line Mounting Lift Valves

Ratings

Normal Closed – NC		Max. Flow	Max. Pressure	Operating Temperature Range	Weight	Terminations N: DIN 43650 Y: Lead Wires(2)
Normal Open – NO						
NC	NO	20lpm (5.28USgpm)	210 bar (3000PSI)	-20°C ~ 120°C 4°F ~ 248°F	1.5kg (3.3 lbs) with coil	

Dimensions:

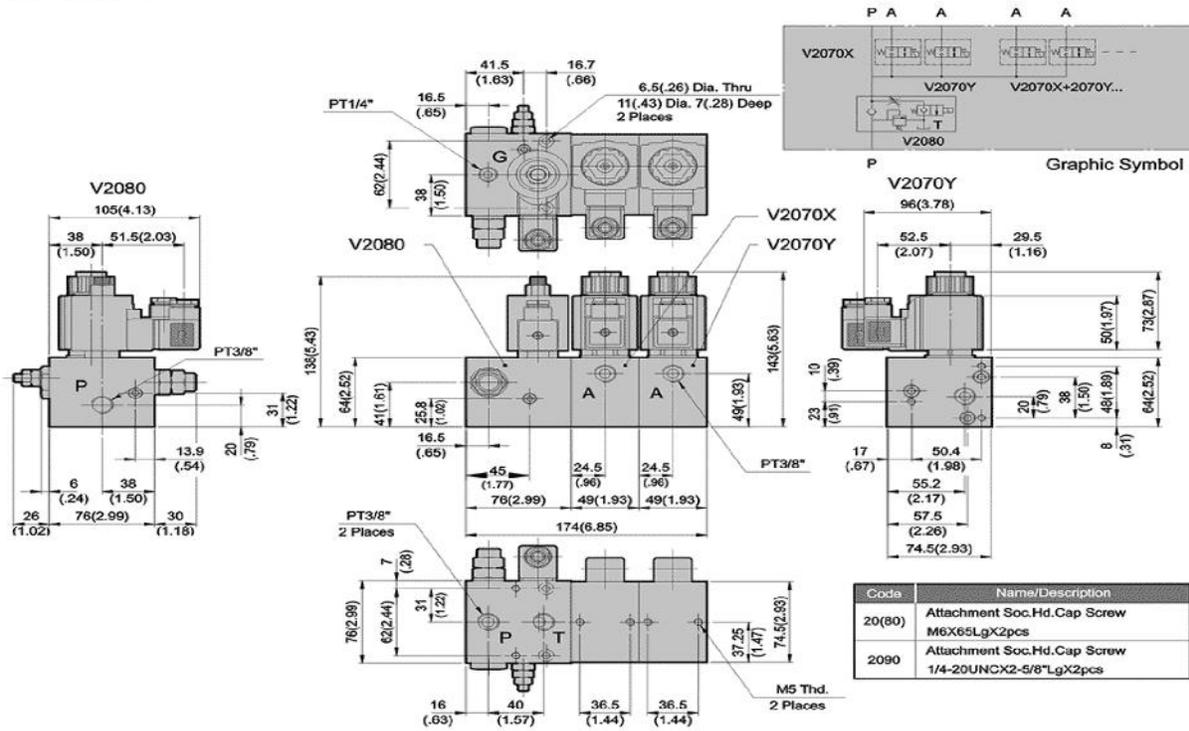

V3080 – 3/4" Line Mounting Lift Valves

Ratings

Normal Closed – NC		Max. Flow	Max. Pressure	Operating Temperature Range	Weight	Terminations
NC	NO					
NC	NO	40lpm (10.57USgpm)	210 bar (3000PSI)	-20°C ~ 120°C 4°F ~ 248°F	0.7kg (1.54 lbs) with coil	N: DIN 43650 Y: Lead Wires(2)

Dimensions:

