



Bell Hydromatics

Poppet Valve & Lift Valve\ Poppet Valves Solenoid Cartridge Type




Ordering Code

V2066	A4	*	10
Series Number	Coil Type	Option	Design Number
V2066	A1: AC 100V(50/60Hz), AC 110V(60Hz)	NONE: Standard	
	A2: AC 200V(50/60Hz), AC 220V(60Hz)		
	A3: AC 110V(50Hz)		
	A4: AC 220V(50Hz)		
V3066	A5: AC 240V(50Hz)	OM: with Manual	
	A8: AC 380V(50/60Hz)		
	D1: DC 12V		
	D2: DC 24V		

Ratings

Normal Closed – NC Normal Open – NO		Max. Flow lpm(USgpm)	Max. Pressure bar(Psi)	Operating Temperature Range	Weight kg(lbs)	Terminations
NC	NO	20 (5.28)	210 (3000)	-20°C ~ 120°C -4°F ~ 248°F	0.2 (0.44) with coil	N: DIN 43650 Y: Lead Wires(2)

Dimensions:

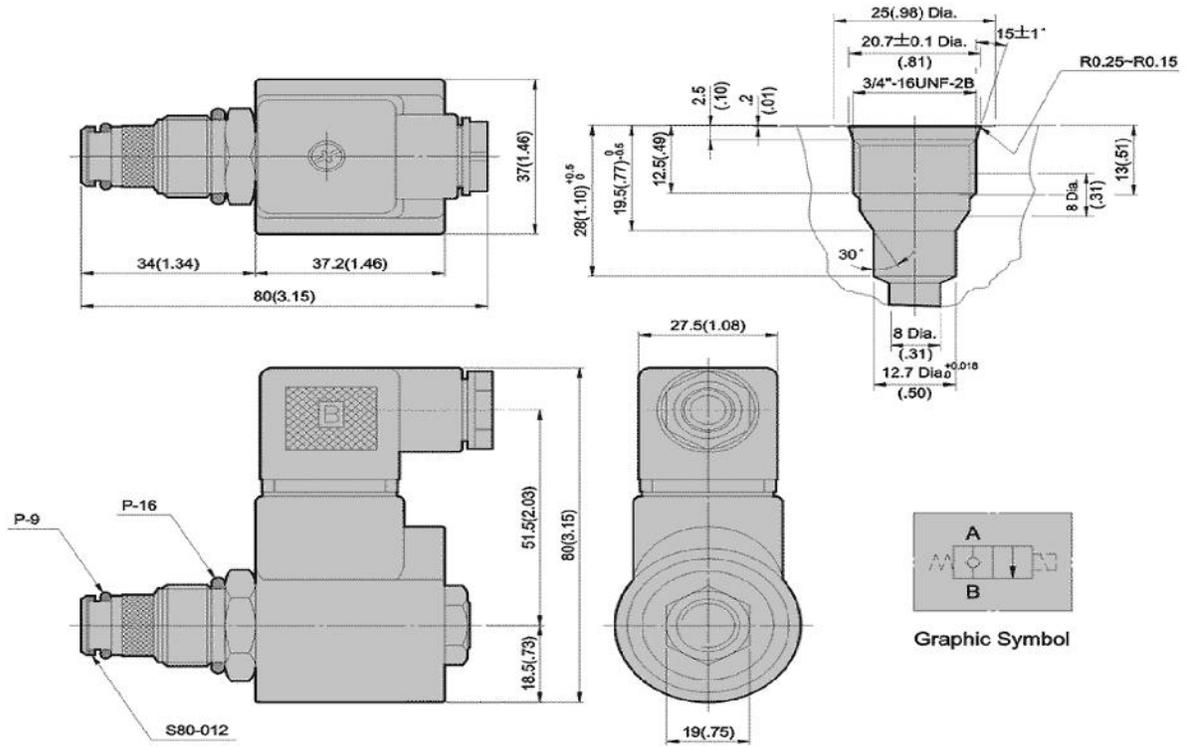

Ratings

Normal Closed – NC		Max. Flow lpm(USgpm)	Max. Pressure bar(PSI)	Operating Temperature Range	Weight kg(lbs)	Terminations N: DIN 43650
NC	Normal Open – NO					
NC	NO	40 (10.57)	210 (3000)	-20°C ~ 120°C -4°F ~ 248°F	0.4 (0.88) with coil	

Dimensions:

