



Bell Hydromatics

Poppet Valves Solenoid Check Valves V2068/V3068/V6068 Series



Ordering Code


V2068	A4	*	10
Series Number	Coil Type	Option	Design Number
V2068	A1: AC 100V(50/60Hz), AC 110V(60Hz)	NONE: Standard	10: PT (Rc) Threaded Connection
	A2: AC 200V(50/60Hz), AC 220V(60Hz)		
	A3: AC 110V(50Hz)		
V3068	A4: AC 220V(50Hz)	OM: with Manual	1080: PF(G) Threaded Connection
	A5: AC 240V(50Hz)		
	A8: AC 380V(50/60Hz)		
V6068	D1: DC 12V		1090: NPT Threaded Connection
	D2: DC 24V		

1/4" Line Mounting Solenoid Check Valves

Ratings

Normal Closed – NC		Max. Flow	Max. Pressure	Operating Temperature Range	Weight	Terminations N: DIN 43650 Y: Lead Wires(2)
NC	NO					
		20lpm (5.28USgpm)	210 bar (3000PSI)	-20°C ~ 120°C-4°F ~ 248°F	0.5kg (1.1 lbs)with coil	

Dimensions:

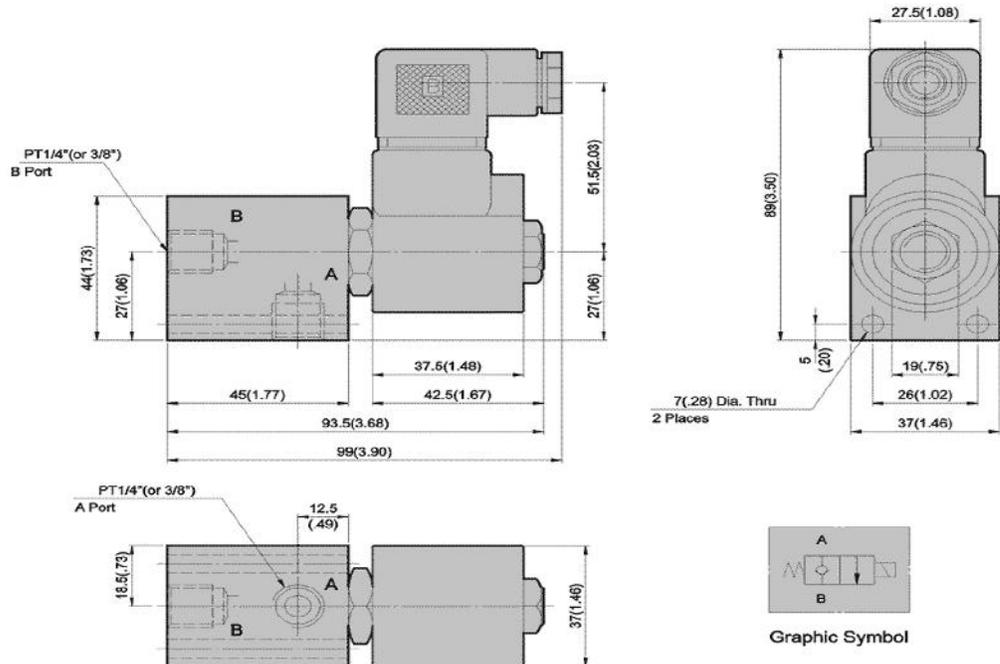


3/8" Line Mounting Solenoid Check Valves

Ratings

Normal Closed – NC Normal Open – NO		Max. Flow lpm(USgpm)	Max. Pressure bar(Psi)	Operating Temperature Range	Weight kg(lbs)	Terminations
NC	NO	40 (10.57)	210 (3000)	-20°C ~ 120°C -4°F ~ 248°F	0.5 (1.1) with coil	N: DIN 43650

Dimensions:

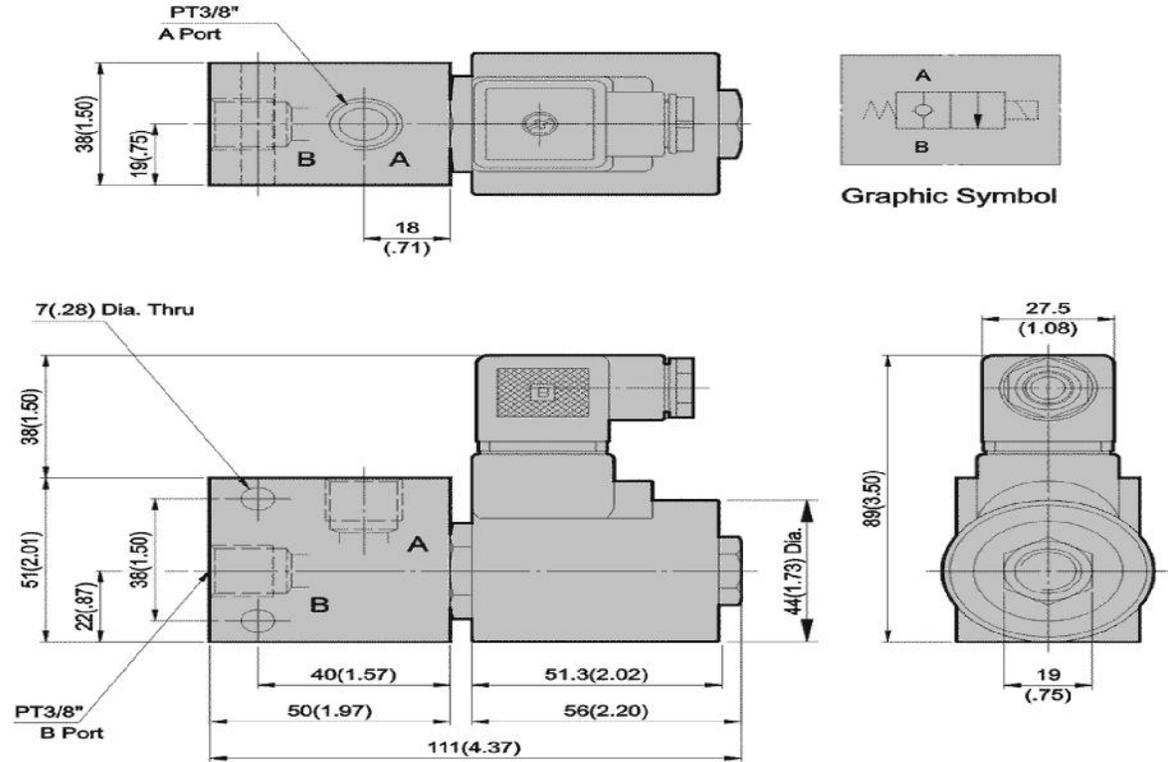

3/4" Line Mounting Solenoid Check Valves

Ratings

Normal Closed – NC Normal Open – NO		Max. Flow lpm(USgpm)	Max. Pressure bar(Psi)	Operating Temperature Range	Weight kg(lbs)	Terminations
NC	NO	80 (21.14)	210 (3000)	-20°C ~ 120°C -4°F ~ 248°F	0.8 (1.8) with coil	N: DIN 43650

Dimensions:

