




SOLENOID CARTRIDGE TYPE CHECK VALVE

■ ORDERING CODE:

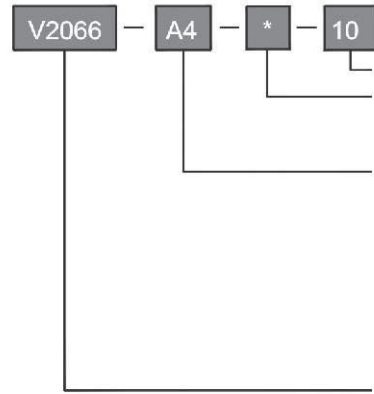



Graphic Symbol

■ RATINGS

V2066					
Normal Closed-NC Normal Open-NO	Max. Flow lpm(USgpm)	Max. Pres. bar(PSI)	Operating Temperature Range	Weight kg(lbs)	Terminations N:DIN 43650 Y:Lead Wires(2)
NC NO	20(5.28)	210(3000)	-20°C~120°C -4°F~248°F	0.2(0.44) With Coil	

DIMENSIONS

MILLIMETERS (INCHES)

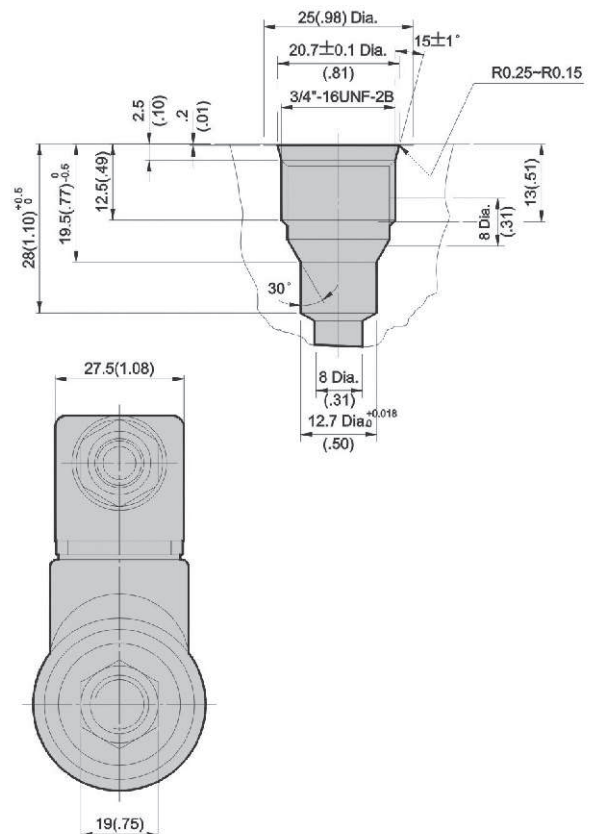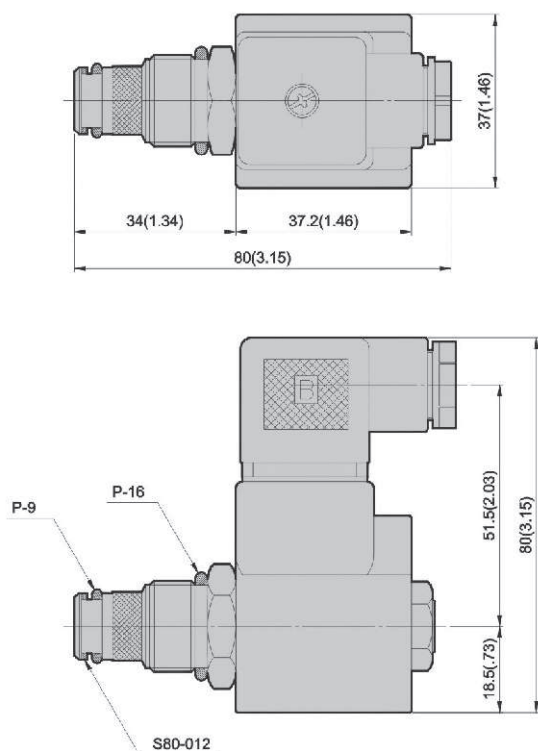

■ ORDERING CODE:

V3066 – A4 – * – 10

DESIGN NUMBER

OPTION:

NONE:STANDARD
OM:WITH MANUAL

COIL TYPE:

A1:AC100V(50/60Hz),AC110V(60Hz)

A2:AC200V(50/60Hz),AC220V(60Hz)

A3:AC110V(50Hz)



A4:AC220V(50Hz)

A5:AC240V(50Hz)

D1:DC12V D3:DC

D1:DC12V D2:DC24V
SERIES NUMBER

SERIES NUMBER



Graphic Symbol

■ RATINGS

V3066						
Normal Closed-NC Normal Open-NO		Max. Flow lpm(USgpm)	Max. Pres. bar(PSI)	Operating Temperature Range	Weight kg(lbs)	Terminations N:DIN 43650
NC	NO	40(10.57)	210(3000)	-20°C~120°C -4°F~248°F	0.4(.88) With Coil	

DIMENSIONS

MILLIMETERS (INCHES)

