

CETOP-3 SINGLE SOLENOID CHECK MODULAR VALVE

■ ORDERING CODE:

MSC - A - 01 - A4 - * - 20

DESIGN NUMBER
20: WITH DIN 912 BOLTS
2090: WITH UNC (NORTH AMERICAN) BOLTS


OPTION:
NONE: STANDARD
OM: WITH MANUAL

COIL TYPE:
A1: AC100V(50/60Hz), AC110V(60Hz)
A2: AC200V(50/60Hz), AC220V(60Hz)
A3: AC110V(50Hz)
A4: AC220V(50Hz)
A5: AC240V(50Hz)
A8: AC380V(50/60Hz)
D1: DC12V D2: DC24V

VALVE SIZE:
01: 1/8"


CONTROL LINE
A: A LINE
B: B LINE

SOLENOID CHECK MODULAR VALVE



MSCA-01

MSCB-01

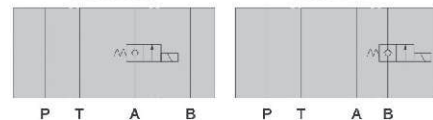




Graphic Symbol

■ RATINGS

MSC*-01					
Normal Closed-NC	Max. Flow	Max. Pres.	Operating	Weight	Terminations N: DIN 43650 Y: Lead Wires(2)
Normal Open-NO	lpm(USgpm)	bar(PSI)	Temperature Range	kg(lbs)	
NC	NO	20(5.28)	210(3000)	-20°C~120°C -4°F~248°F	1(2.2) With Coil



DIMENSIONS

MILLIMETERS (INCHES)

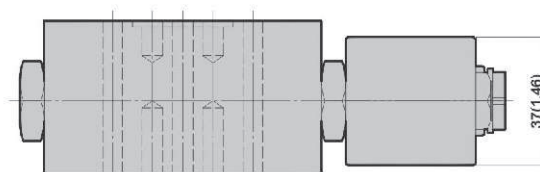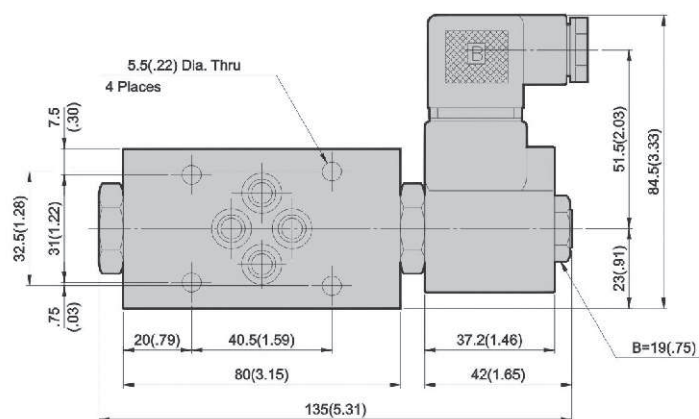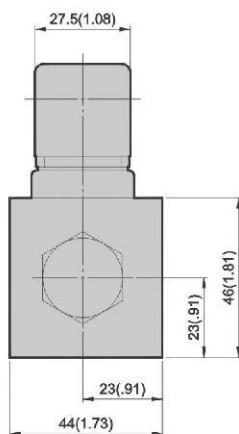

Code	Name/Description
20	Attachment Soc.Hd.Cap Screw M5X90LgX4pcs
2090	Attachment Soc.Hd.Cap Screw No.10-24UNCX3-1/2"LgX4pcs

■ ORDERING CODE:

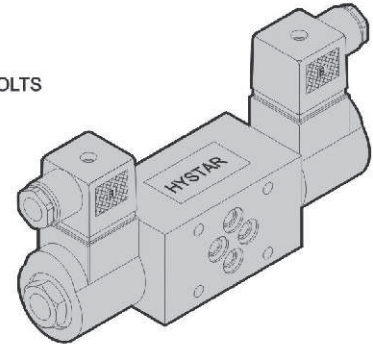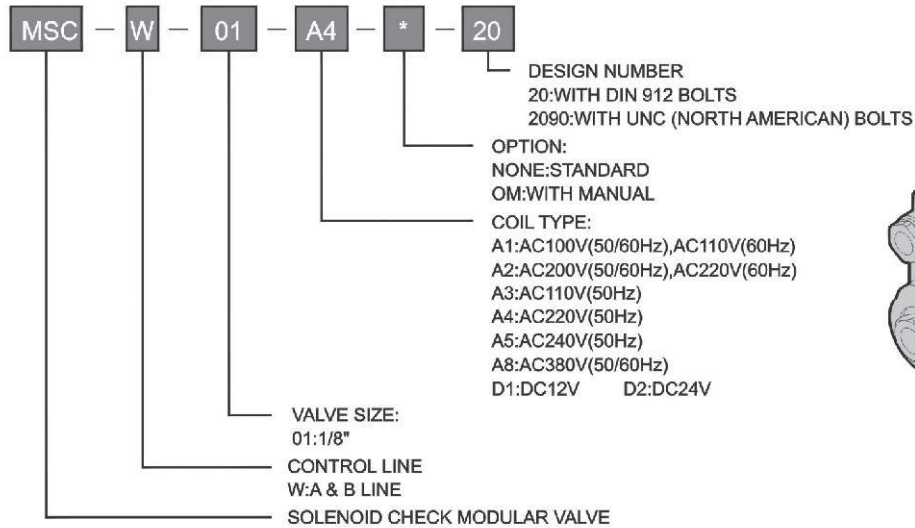

P T A B


Graphic Symbol

■ RATINGS

MSCW-01						
Normal Closed-NC Normal Open-NO		Max. Flow lpm(USgpm)	Max. Pres. bar(PSI)	Operating Temperature Range	Weight kg(lbs)	Terminations N:DIN 43650 Y:Lead Wires(2)
NC	NO	20(5.28)	210(3000)	-20°C~120°C -4°F~248°F	1.3(2.86) With Coil	

DIMENSIONS




MILLIMETERS (INCHES)

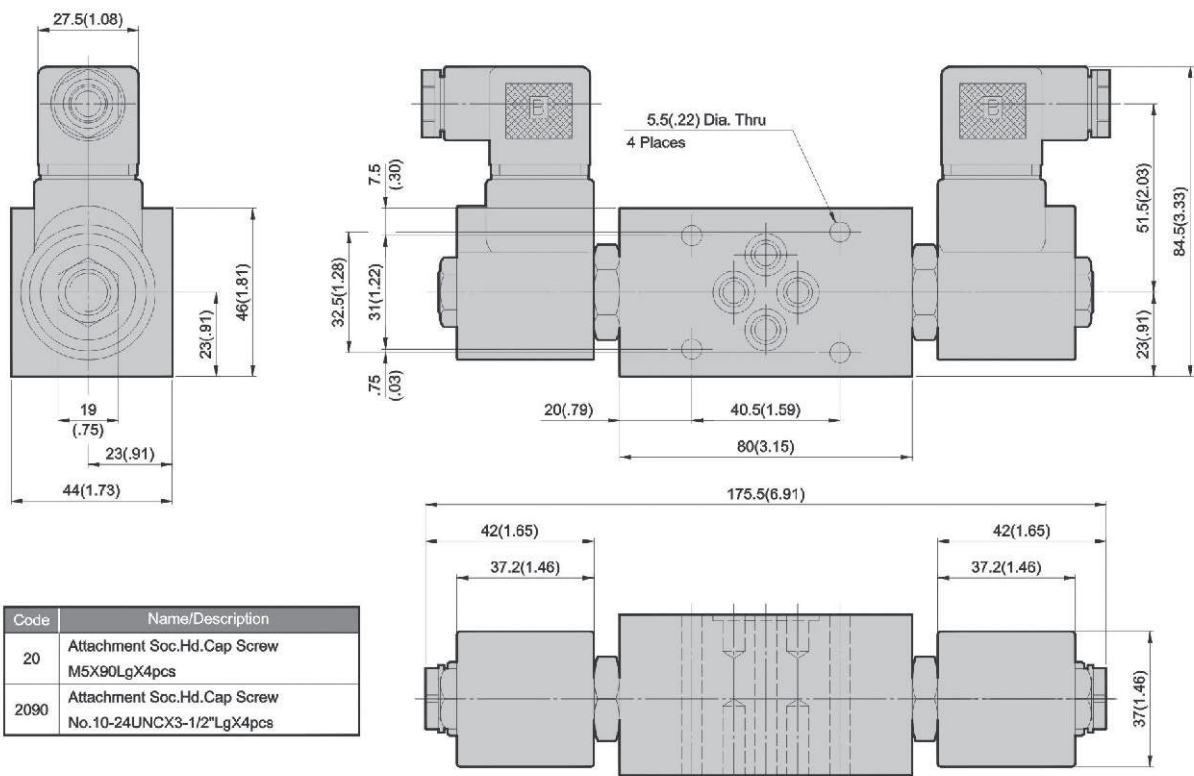

Code	Name/Description
20	Attachment Soc.Hd.Cap Screw M5X90LgX4pcs
2090	Attachment Soc.Hd.Cap Screw No.10-24UNCX3-1/2"LgX4pcs

CETOP-5 SINGLE SOLENOID CHECK MODULAR VALVE

ORDERING CODE:

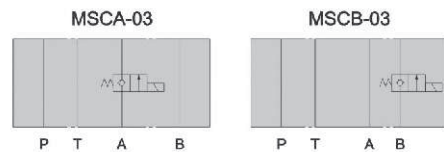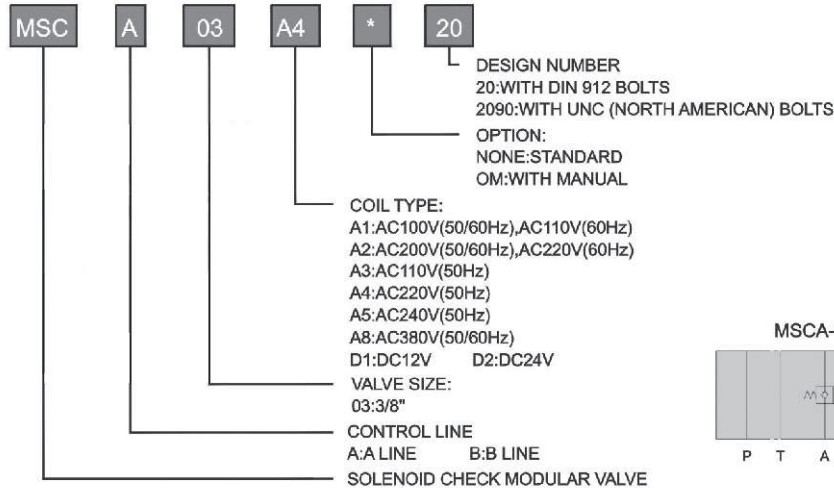


Graphic Symbol

RATINGS

MSC*-03					
Normal Closed-NC	Max. Flow	Max. Pres.	Operating	Weight	Terminations
Normal Open-NO	lpm(USgpm)	bar(PSI)	Temperature Range	kg(lbs)	
NC	NO	40(10.5)	210(3000)	-20°C~120°C -4°F~248°F	2.8(6.2) With Coil

DIMENSIONS

MILLIMETERS (INCHES)

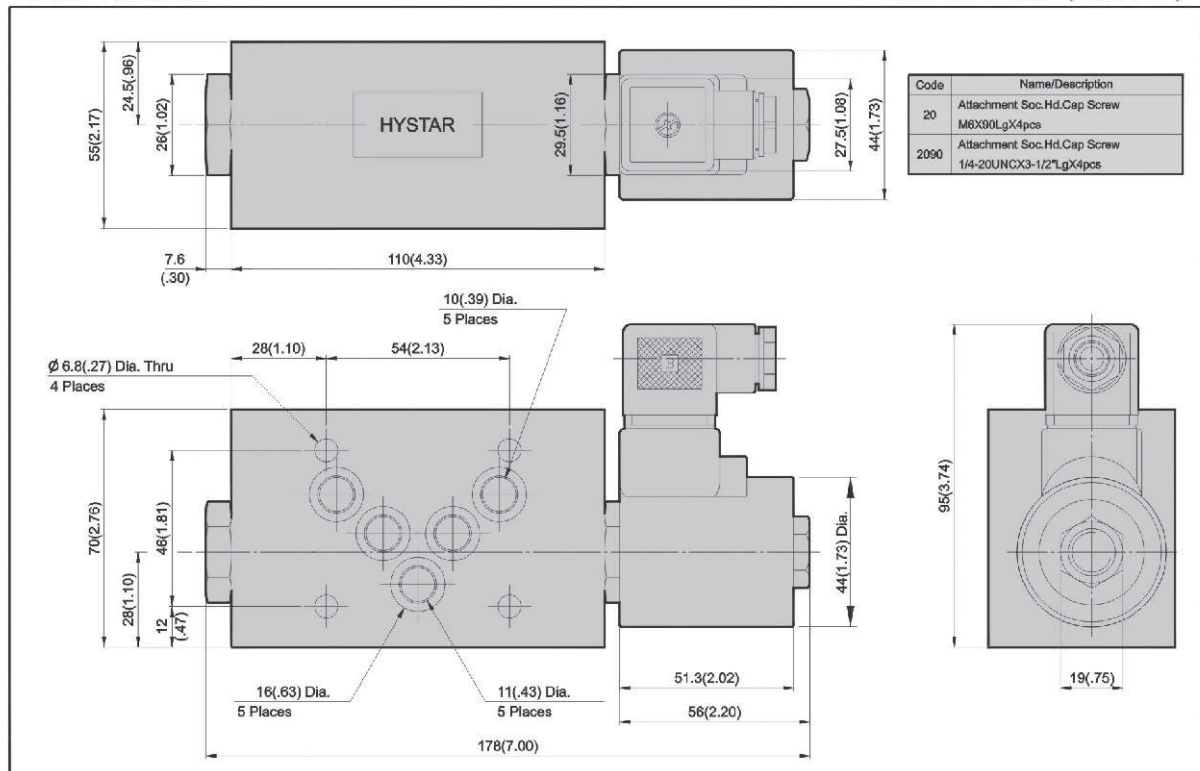

CETOP-5 DOUBLE SOLENOID CHECK MODULAR VALVE

ORDERING CODE:

MSC — W — 03 — A4 — * — 20

DESIGN NUMBER
20: WITH DIN 912 BOLTS
2090: WITH UNC (NORTH AMERICAN) BOLTS



OPTION:
NONE: STANDARD
OM: WITH MANUAL

COIL TYPE:
A1: AC100V(50/60Hz), AC110V(60Hz)
A2: AC200V(50/60Hz), AC220V(60Hz)
A3: AC110V(50Hz)
A4: AC220V(50Hz)
A5: AC240V(50Hz)
A8: AC380V(50/60Hz)
D1: DC12V
D2: DC24V

VALVE SIZE:
03: 3/8"

CONTROL LINE
W: A & B LINE

SOLENOID CHECK MODULAR VALVE



Graphic Symbol

RATINGS

MSCW-03					
Normal Closed-NC Normal Open-NO	Max. Flow lpm(USgpm)	Max. Pres. bar(PSI)	Operating Temperature Range	Weight kg(lbs)	Terminations N: DIN 43650
NC NO	40(10.5)	210(3000)	-20°C ~ 120°C -4°F ~ 248°F	3.5(7.7) With Coil	

DIMENSIONS

MILLIMETERS (INCHES)

Code	Name/Description
20	Attachment Soc.Hd.Cap Screw M6X90LgX4pcs
2090	Attachment Soc.Hd.Cap Screw 1/4-20UNCX3-1/2"LgX4pcs

