
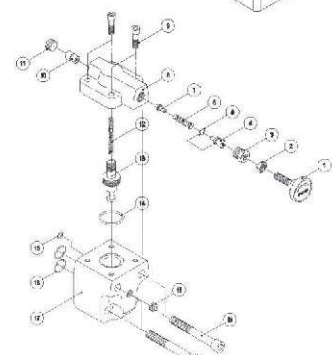
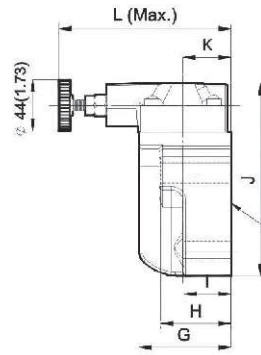
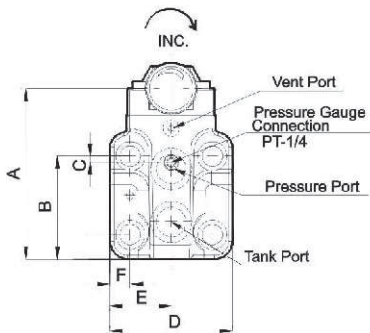


DIMENSIONS

MILLIMETERS(INCHES)

BG-03-06-10 Pilot Operated Relief Valves(Sub-Plate Type)







SYMBOL

Valve Specifications & Attachment

Model	BG-03	BG-06	BG-10
Flow rating	100 lpm (26.4 gpm)	200 lpm (52.8 gpm)	400 lpm (106 gpm)
Max. Pressure	250 bar (3600 psi)	250 bar (3600 psi)	250 bar (3600 psi)
Weight kg(lbs.)	4.7 (10.4)	5.6 (12.3)	5.7 (19.2)
CODE:20	M12 X1.5/16-20pc	M16 X1.5/16-20pc	M20 X1.5/16-20pc
CODE:2090	1/2-13UNCX3-3/4LgX2pc 1/2-13UNCX3-3/4LgX2pc	5/8-11UNCX3-1/4LgX2pc 5/8-11UNCX3-1/4LgX2pc	3/4-10UNCX3-3/4LgX2pc 3/4-10UNCX3-1/2LgX2pc
Surface O-Ring	P0X1pc, P20X2pc	P10AX1pc, P29X2pc	P10AX1pc, P36X2pc
ISO Mounting	6284-AR-08-2-A	6284-AS-08-2-A	6284-AT-10-2-A

Model	A	B	C	D	E	F	G	H	I	J	K	L
BG-03	117(4.60)	75.5(2.97)	21.5(.84)	83(3.26)	41.5(1.63)	14.5(.57)	78(3.07)	77.5(3.05)	58.5(2.30)	136(5.35)	41(1.61)	146(5.74)
BG-06	145(5.70)	87.5(3.44)	5.5(.21)	104(4.09)	52(2.04)	17(.66)	78(3.07)	60(2.36)	40(1.57)	164(6.45)	41(1.61)	146(5.74)
BG-10	175(6.88)	106(4.17)	8(.31)	125(4.92)	62.5(2.46)	21.2(.83)	90(3.54)	69.5(2.73)	49.5(1.94)	195(7.67)	46(1.81)	155(6.10)

BT-03-06-10 Pilot Operated Relief Valves(Threaded Type)

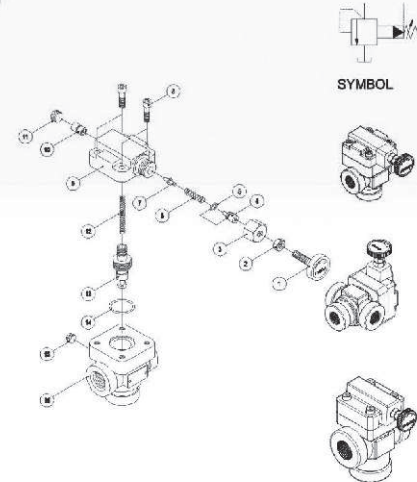

SYMBOL

Valve Specifications & Attachment

Model	BT-03	BT-06	BT-10
Flow rating	100 lpm (26.4 gpm)	200 lpm (52.8 gpm)	400 lpm (106 gpm)
Max. Pressure	250 bar (3600 psi)	250 bar (3600 psi)	250 bar (3600 psi)
Weight kg(lbs.)	5 (11.0)	5 (11.0)	8.5 (18.7)
CODE:20	3/8 PT	3/4 PT	1 1/4 PT
CODE:2090	3/8 NPT	3/4 NPT	1 1/4 NPT

Model	A	B	C	D	E	F	G	H
BT-03	77(3.03)	38.5(1.51)	132(5.19)	31.5(1.24)	123(4.84)	42(1.65)	65(2.55)	42(1.65)
BT-06	102(4.01)	51(2.00)	140(5.51)	39(1.53)	132(5.19)	52(2.04)	62(2.44)	52(2.04)
BT-10	140(5.51)	70(2.75)	152(5.98)	48(1.88)	191(7.51)	84(3.30)	86(3.38)	82(3.22)