


■ Ordering Code


RC - T - 03 - B - 20




SYMBOL

Series No	Type of Mounting	Valve Size	Pressure Range	Design No
R: Pressure Reducing Valves RG/RT	G Subplate Mounting 	03: (3/8") ISO 5781-AG-06-2-A	B: 7~70 bar (100~1000 PSI) 	20 (G) DIN 912 bolts 
RC: Pressure Reducing and Check Valves RCG/RCT	T Threaded Connection 	06: (3/4") ISO 5781-AH-08-2-A	C: 35~140 bar (500~2000 PSI) 	2090 (G) UNC bolts (North America) 
			H: 70~225 bar (1000~3200 PSI) 	20 (T) PT Connection 
				2090 (T) NPT Connection (North America) 

RG




RT





MODEL	DESCRIPTION	PAGE
RG-03-06	Pressure Reducing Valves(Sub-Plate Type)	260
RT-03-06	Pressure Reducing Valves(Threaded Type)	260
RCG-03-06	Pressure Reducing with Check Valves(Sub-Plate Type)	261
RCT-03-06	Pressure Reducing with Check Valves(Threaded Type)	261

RCG



RCT




SYMBOL

RCT-06

DIMENSIONS

MILLIMETERS(INCHES)

RG-03-06 Pressure Reducing Valves(Sub-Plate Type)





Valve Specifications & Attachment

Model	RG-03	RG-06
Flow Rating	50 lpm (13.2 gpm)	125 lpm (33 gpm)
Max. Pressure	250 bar (3600 psi)	250 bar (3600 psi)
Weight kg(lbs.)	4.5 (9.9)	6.8 (15.0)
CODE:20	M10 X50LgX4pcs	M10 X50LgX4pcs
CODE:2090	3/8-16UNCX2LgX4pcs	3/8-16UNCX2LgX4pcs
Surface O-Ring	P9X1pc, P18X2pc	P9X2pc, P29X2pc
ISO Mounting	5781-AG-06-2-A	5781-AH-08-2-A




SYMBOL

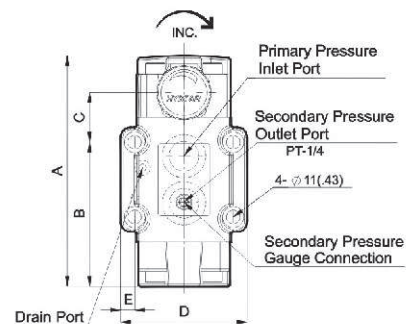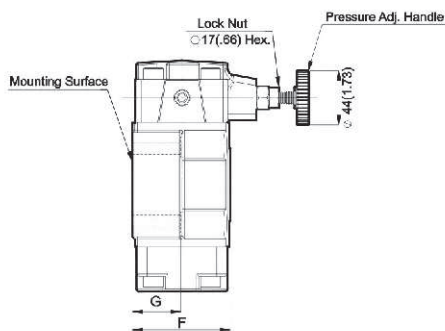

Model	A	B	C	D	E	F	G	H	I	J
RG-03	159(6.25)	93.5(3.68)	40.5(1.59)	89(3.50)	11.2(.44)	69(2.71)	42(1.65)	145.5(5.72)	43(1.69)	44.5(1.75)
RG-06	186(7.32)	116.5(4.58)	40(1.57)	102(4.01)	11.3(.44)	79(3.11)	39(1.53)	143(5.62)	40(1.57)	51(2.00)

RT-03-06 Pressure Reducing Valves(Threaded Type)






Valve Specifications & Attachment

Model	RT-03	RT-06
Flow Rating	50 lpm (13.2 gpm)	125 lpm (33 gpm)
Max. Pressure	250 bar (3600 psi)	250 bar (3600 psi)
Weight kg(lbs.)	4.3 (9.5)	6.9 (15.2)
CODE:20	3/8" PT	3/4" PT
CODE:2090	3/8" NPT	3/4" NPT



SYMBOL

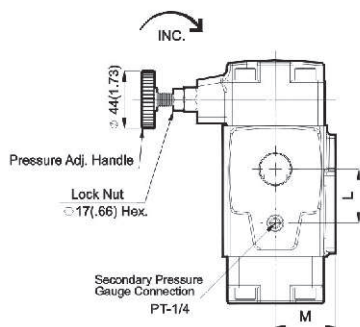


Model	A	B	C	D	E	F	G	H	I	J	K	L	M
RT-03	159(6.25)	86(3.38)	48(1.88)	30(1.18)	74(2.91)	41.5(1.63)	47(1.85)	151(5.94)	42(1.65)	80(3.14)	40(1.57)	30(1.18)	41.5(1.63)
RT-06	186(7.32)	103(4.05)	53(2.08)	34(1.33)	86(3.38)	46(1.81)	53(2.08)	148.5(5.84)	46(1.81)	96(3.77)	48(1.88)	42(1.65)	46(1.81)

DIMENSIONS

MILLIMETERS(INCHES)

RCG-03-06 Pressure Reducing with Check Valves(Sub-Plate Type)






Valve Specifications & Attachment

Model	RCG-03	RCG-06
Flow Rating	50 lpm (13.2 gpm)	125 lpm (33 gpm)
Max. Pressure	250 bar (3600 psi)	250 bar (3600 psi)
Weight kg(lbs.)	5.4 (11.9)	8.1 (17.9)
CODE:20	M10 X70LgX4pcs	M10 X80LgX4pcs
CODE:2090	3/8-16UNCX3-3/4LgX4pcs	3/8-16UNCX3-1/4LgX4pcs
Surface O-Ring	P9X1pc, P18X2pc	P9X2pc, P29X2pc
ISO Mounting	5781-AG-06-2-A	5781-AH-08-2-A




SYMBOL

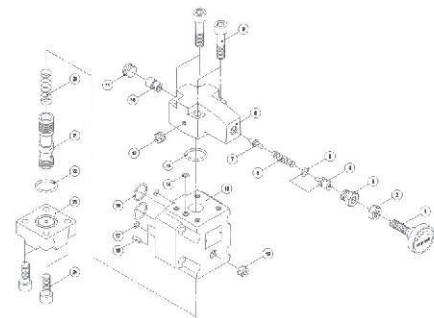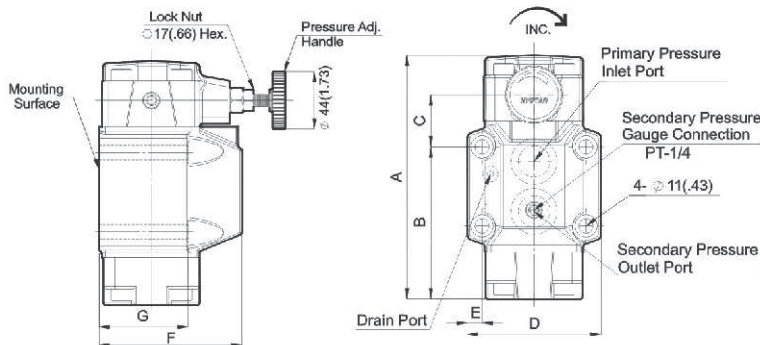

Model	A	B	C	D	E	F	G	H	I	J
RCG-03	158.5(6.24)	93.5(3.68)	40.5(1.59)	89(3.50)	11.2(.44)	90(3.54)	56(2.28)	144.5(5.68)	59(2.32)	44.5(1.75)
RCG-06	186(7.32)	116.5(4.58)	40(1.57)	102(4.01)	11.3(.44)	104(4.09)	68(2.67)	142.5(5.61)	69(2.71)	51(2.00)

RCT-03-06 Pressure Reducing with Check Valves(Threaded Type)




Valve Specifications & Attachment

Model	RCT-03	RCT-06
Flow Rating	50 lpm (13.2 gpm)	125 lpm (33 gpm)
Max. Pressure	250 bar (3600 psi)	250 bar (3600 psi)
Weight kg(lbs.)	4.8 (10.6)	7.8 (17.2)
CODE:20	3/8" PT	3/4" PT
CODE:2090	3/8" NPT	3/4" NPT



SYMBOL

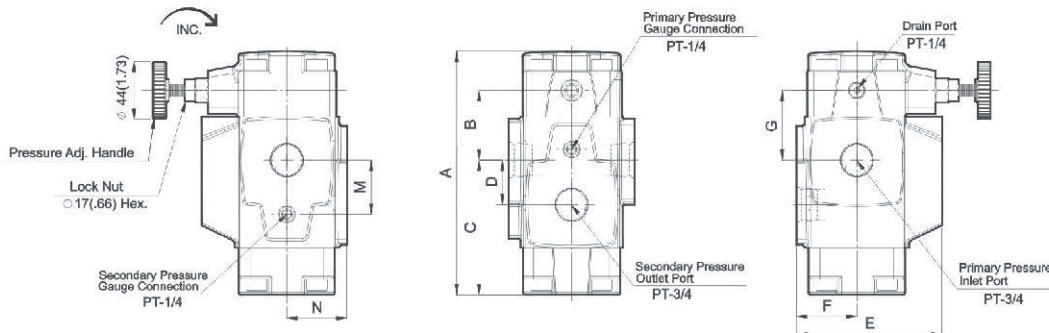


Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N
RCT-03	158.5(6.24)	48(1.88)	86(3.38)	30(1.18)	95(3.74)	41.5(1.63)	47(1.85)	151(5.94)	41.5(1.63)	15.5(.61)	80(3.14)	40(1.57)	30(1.18)	41.5(1.63)
RCT-06	186(7.32)	53(2.08)	103(4.05)	34(1.33)	111(4.37)	46(1.81)	53(2.08)	148.5(5.84)	46(1.81)	22.5(.88)	96(3.77)	48(1.88)	41.5(1.63)	46(1.81)

INSTALLATION DIMENSIONS


MILLIMETERS(INCHES)

BG-03-06-10
BRG-03-06-10
SBG-03-06-10

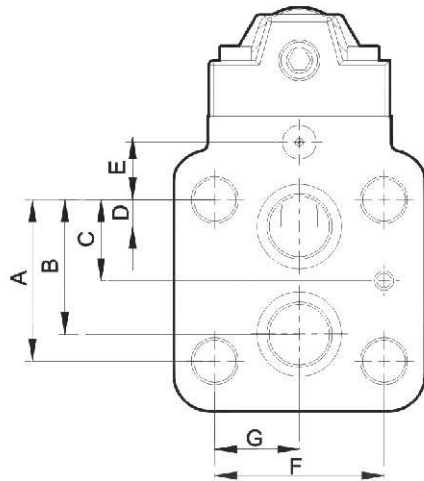


	A	B	C	D	E	F	G
03	53.8(2.11)	47.4(1.86)	22(0.86)	22(0.86)	0	53.8(2.11)	26.9(1.05)
06	66.7(2.62)	55.5(2.18)	33.4(1.31)	11(0.43)	23.8(0.93)	70(2.75)	35(1.37)
10	88.9(3.50)	76.2(3.00)	44.5(1.75)	12.7(.50)	31.8(1.25)	82.6(3.25)	41.3(1.62)

RG-06
HG-06
HCG-06
CPDG-06

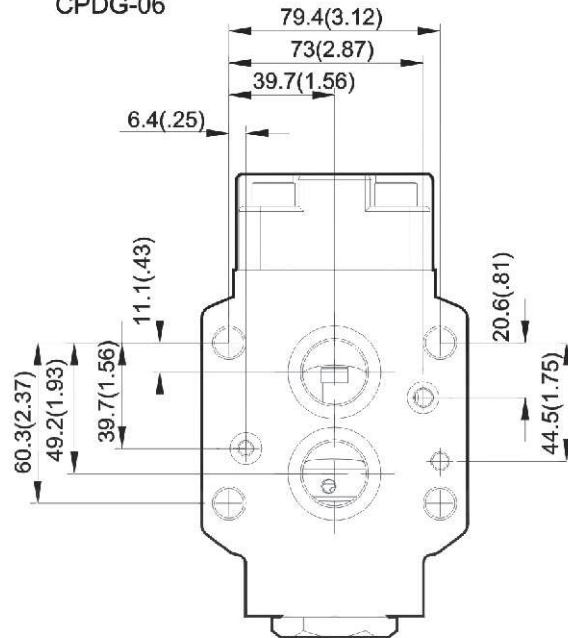

RG-03
HG-03
HCG-03
CPDG-03

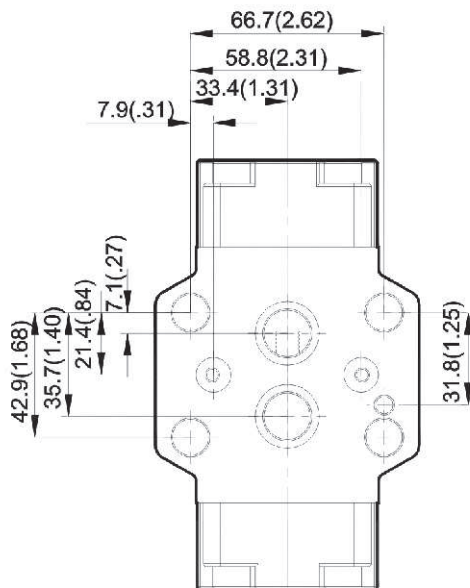

HG-10
HCG-10
CPDG-10

