




Ordering Code

Order Code	NG	Flow (lpm)	D1	D2	T1	L1	A/F
NRV-C-06-01 X 1/4" BSP	06	10	G 1/4"	18.5	12	58	19
NRV-C-08-01 X 3/8" BSP	08	20	G 3/8"	23	12	58	24
NRV-C-10-01 X 1/2" BSP	10	30	G 1/2"	29.5	14	72	30
NRV-C-16-01 X 3/4" BSP	16	80	G 3/4"	35.5	16	85	36
NRV-C-20-01 X 1" BSP	20	120	G 1"	45.5	18	98	46
NRV-C-30-01 X 1-1/4" BSP	25	230	G 1-1/4"	59.5	20	120	60
NRV-C-30-01 X 1-1/2" BSP	30	280	G 1-1/2"	64.5	22	132	65

Line Mounting

Check Valve Line Mounting

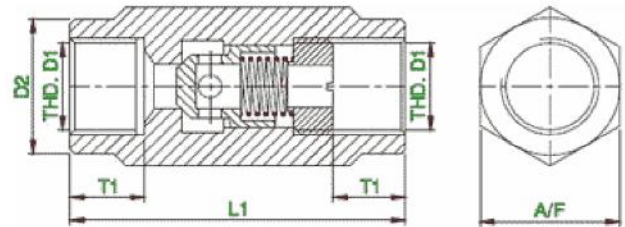

Technical Specifications

Mounting Style	In Line Mounting
Viscosity	10 CST to 380 CST
Operating Pressure	315 bar
Fluid Temperature Range	-20 to +70 °C
Flow Direction	Free Flow from Port A to B Leakage Free Closure in Opposite Direction
Construction	Seat Type
Cracking Pressure Available	0.5, 1.5, 3, 5, 7, 10 bar
Hydraulic Symbol	A B