



Bell Hydromatics

Poppet Valve & Lift Valve
Poppet Valves
Solenoid Check Valves
V2067/ V3067/ V6067 Series



Ordering Code


V2068	A4	*	10
Series Number	Coil Type	Option	Design Number
V2067	A1: AC 100V(50/60Hz), AC 110V(60Hz)	NONE: Standard	10: with DIN 912 Bolts
	A2: AC 200V(50/60Hz), AC 220V(60Hz)		
	A3: AC 110V(50Hz)		
V3067	A4: AC 220V(50Hz)	OM: with Manual	1090: with UNC (North American) Bolts
	A5: AC 240V(50Hz)		
	A8: AC 380V(50/60Hz)		
V6067	D1: DC 12V		
	D2: DC 24V		

V2037 CETOP-3 Solenoid Check Valves

Ratings

Normal Closed – NC		Max. Flow	Max. Pressure	Operating Temperature Range	Weight	Terminations N: DIN 43650 Y: Lead Wires(2)
NC	NO					
		20lpm (5.28USgpm)	210 bar (3000PSI)	-20°C ~ 120°C-4°F ~ 248°F	0.5kg (1.1 lbs)with coil	

Dimensions:

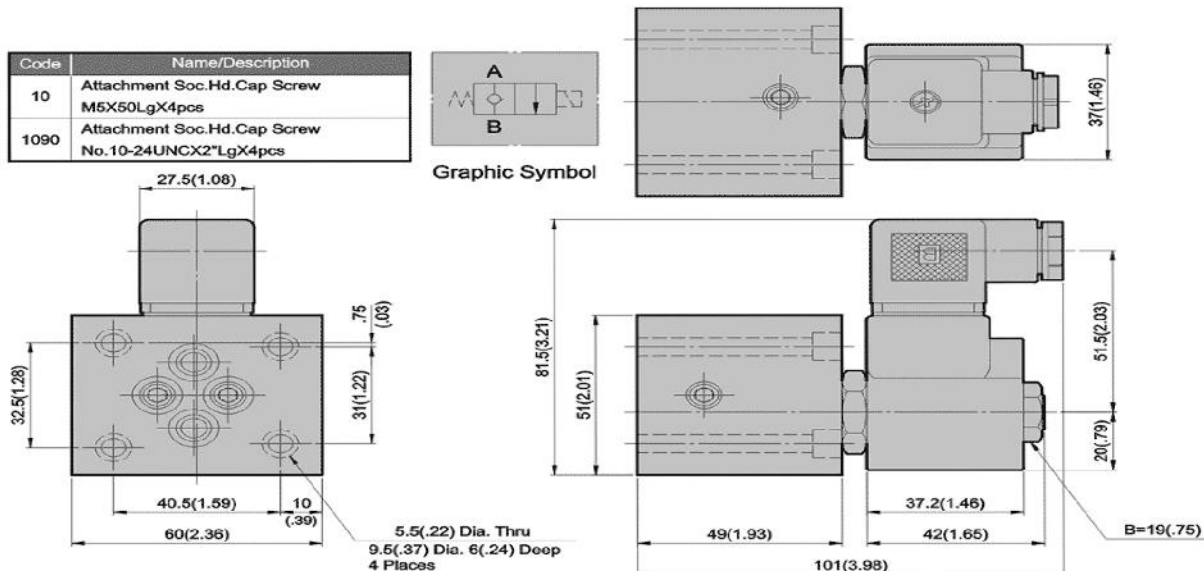


V3067 Gasket Mounting Solenoid Check Valves

Ratings

Normal Closed – NC		Max. Flow lpm(USgpm)	Max. Pressure bar(PSI)	Operating Temperature Range	Weight kg(lbs)	Terminations N: DIN 43650 Y: Lead Wires(2)
Normal Open – NO						
NC	NO	40 (10.57)	210 (3000)	-20°C ~ 120°C -4°F ~ 248°F	0.7 (1.54) with coil	

Dimensions:

Code	Name/Description
20	Attachment Soc.Hd.Cap Screw M6X55LgX4pcs
2090	Attachment Soc.Hd.Cap Screw 1/4-20UNCX2-1/8"LgX4pcs

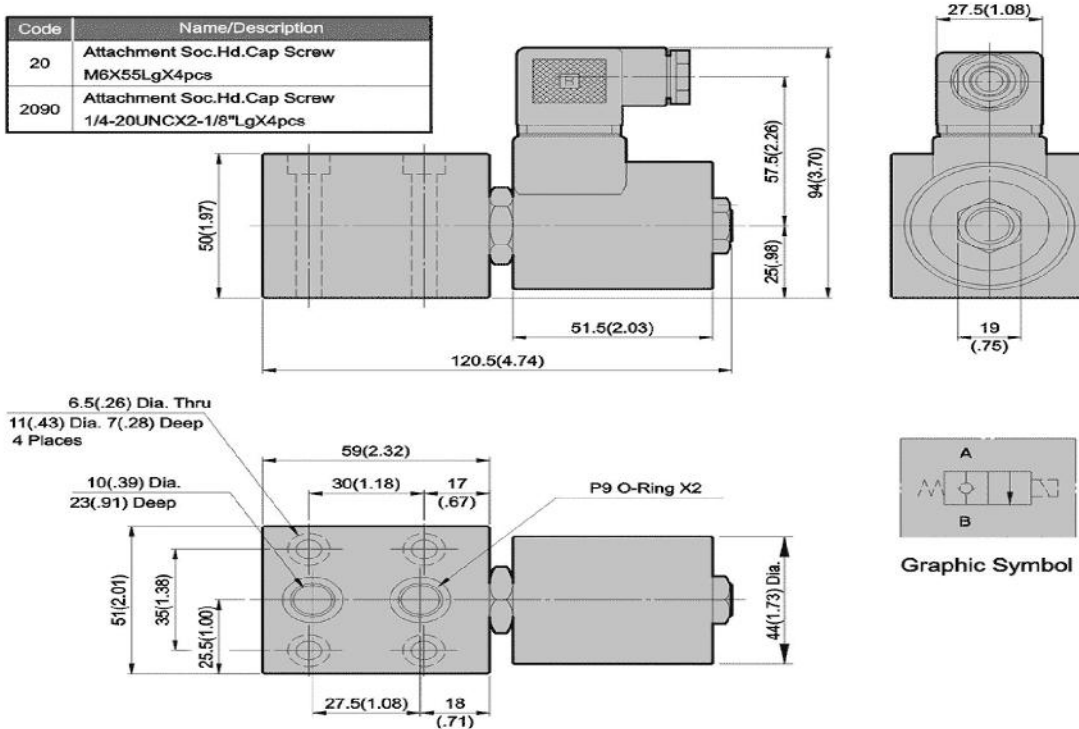

V6067 Gasket Mounting Solenoid Check Valves

Ratings

Normal Closed – NC		Max. Flow lpm(USgpm)	Max. Pressure bar(PSI)	Operating Temperature Range	Weight kg(lbs)	Terminations N: DIN 43650
Normal Open – NO						
NC	NO	80 (21.14)	210 (3000)	-20°C ~ 120°C -4°F ~ 248°F	1.6 (3.52) with coil	

Dimensions:

Code	Name/Description
10	Attachment Soc.Hd.Cap Screw M10X65LgX4pcs
1090	Attachment Soc.Hd.Cap Screw 3/8-16UNCX2-5/8"LgX4pcs

